

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 April 2006 (20.04.2006)

PCT

(10) International Publication Number  
**WO 2006/040732 A1**

(51) International Patent Classification:  
**B62D 21/15** (2006.01) **B60R 27/00** (2006.01)

(21) International Application Number:  
PCT/IB2005/053358

(22) International Filing Date: 12 October 2005 (12.10.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004-298673 13 October 2004 (13.10.2004) JP  
2005-264095 12 September 2005 (12.09.2005) JP

(71) Applicant (for all designated States except US): NISSAN  
MOTOR CO., LTD. [JP/JP]; 2, Takara-cho, Kana-  
gawa-ku, Yokohama, Kanagawa 220-8623 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): FUJIKAWA, Kazu-  
toyo [JP/JP]; 1198, Kamikasuya, Isehara-shi, Kanagawa  
259-1141 (JP).

(74) Agents: STEWART, Michael, B. et al.; Rader, Fishman  
& Grauer PLLC, 39533 Woodward Avenue, Suite 140,  
Bloomfield Hills, Michigan 48304 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,  
KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA,  
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,  
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,  
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,  
VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,  
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: BODY FRAME STRUCTURE FOR AN AUTOMOTIVE VEHICLE

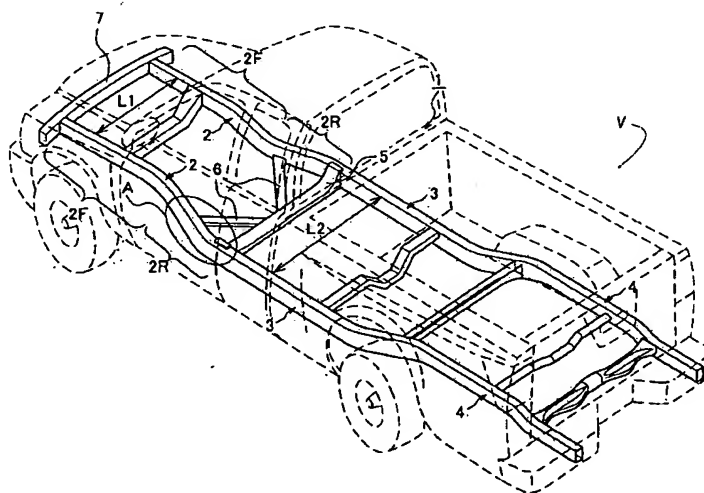

(57) Abstract: In a body frame structure for an automotive vehicle, the amount of the bending and deforming of a longitudinal frame member (2) in the rear direction can be controlled and the amount of the collision energy absorption during a frontal collision can be increased. A kick-up portion (K) that bends and deforms the front portion (2F) upwardly during the application of the collision load is provided between a front portion (2F) and a rear portion (2R) of the closed section of the longitudinal frame member (2), which extend in the longitudinal direction of the vehicle. A deformation guide member (10), which constrains the longitudinal frame member (2) to bend and deform in the lateral direction of the vehicle at the front portion (2F) by colliding portions of the deformation guide member (10) with each other due to the applied frontal collision load, is provided inside the closed section of the kick-up portion (K) of the longitudinal frame members (2).

WO 2006/040732 A1